

Guardian Accessible Pedestrian Signal

Guardian User's Manual

906-0023

Revision A • January 9, 2017



Campbell Company

450 W. McGregor Drive

Boise, Idaho

83705

USA

Tel: 1-208-345-7459 Fax: 1-208-345-7481

Last edited: 09 January 2017

This document is copyright © 09 January 2017 by Campbell Company. All rights reserved.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from Campbell Company.

All copyright, confidential information, patents, design rights and all other intellectual property rights of whatsoever nature contained herein are and shall remain the sole and exclusive property of Campbell Company. The information furnished herein is believed to be accurate and reliable.

However, no responsibility is assumed by Campbell Company for its use, or for any infringements of patents or other rights of third parties resulting from its use.

The Campbell Company name and Campbell Company logo are trademarks or registered trademarks of Campbell Company.

All other trademarks are the property of their respective owners

Guardian User's Manual

906-000X

Document Revision History		
Revision	Revised By	Date
A	Phil Tate	12/31/2016

Firmware and Software Versions	
Component	Version
Guardian Firmware	2.0.0
PedConnex™ Utility	2.0.0

1 Table of Contents

1	Table of Contents	4
2	Introduction	5
2.1	PURPOSE OF THIS DOCUMENT	5
2.2	ADDITIONAL INFORMATION.....	5
2.3	CONTACT INFORMATION	5
3	Overview	6
3.1	PRODUCT OVERVIEW	6
3.2	FEATURES.....	6
3.3	COMPONENTS	6
3.4	AUDIO MESSAGES.....	7
4	System Configuration	8
4.1	SETTING AND OPERATIONAL MODE FEATURES IN PEDCONNEX.....	8
4.2	HOW TO CREATE AND UPDATE AUDIO FILES IN THE GUARDIAN	9
5	Appendix A: Definitions	10

2 Introduction

2.1 Purpose of this Document

The purpose of this document is to describe the operation of the Guardian Accessible Pedestrian Signal.

2.2 Additional Information

- See the Guardian Installation Guide for installation instructions.
- See the Campbell Company Intersection Worksheet for location specific information.
- See the Guardian Wiring Quick Guide for a brief graphical installation Guide.
- See the Base Station Mounting Template for an easy to use hole pattern for mounting Guardian Base Stations.
- See the PedConnex Utility User Manual on how to program and configure the stations.

These documents are available on the Campbell Company Website
<http://www.pedsafety.com/product-installation-guides/>

2.3 Contact Information

The first line of contact should be your regional distributor that the system was purchased from. If you are unable to contact the distributor, contact Campbell Company directly. Campbell Company Tech Support 1-208-345-7459 ext. 8024

3 Overview

3.1 Product Overview

The Guardian is an Accessible Pedestrian Signal (APS) designed for simple, stand-alone operation.

The Guardian provides all of the standards features for an APS as defined by the MUTCD as well as additional modes of operation for local specifications.

- A locator tone, tells a pedestrian that the crossing is equipped with APS and where it can be found.
- An extended press provides specific intersection information and access to additional functions.
- The audible walk tone or message is accompanied by a vibro-tactile indication during the visual walk display.
- Optional clearance phase indications may provide additional information to the pedestrian where appropriate.

Each Guardian APS is configured at the factory based on the specifics provided by the customer on the intersection planning sheet. Campbell's PedConnex utility provides an easy and straight forward interface for programming and configuration.

3.2 Features

- Independent operation; no control unit in cabinet
- Time of day function for night time audio volume
- Easy configuration with PedConnex utility and a USB cable
- Clearance interval options including beaconing and audible countdown
- Designed to operate with an optional Campbell APS Beacon
- Ability to synchronize multiple stations for beaconing utilizing existing field wiring
- Automatic Gain Control (AGC) available for all audio messages
- Independent volumes for locator and non-locator audio messages
- Proprietary design of Guardian station provides directed sound with optional baffles
- Does not require home run for fixed time intersections

3.3 Components

There are two primary components to the Guardian; one or more Guardian stations and a Signal Power Interface (SPI) paired with each station. The SPI takes the Walk and Don't Walk

signals from the pedestrian signal head and converts them to low voltage control signals to operate the Guardian APS station.

The Guardian station is the pedestrian's point of interaction. The station is available in several form factors including:

- Guardian: A fully integrated pedestrian station (figure 1)
- 400A: A station designed to drop into a Campbell MPS 400 Rec Station (figure 2)
- Guardian Mini: A 4" Round station designed to replace a standard Push Button (figure 3)

In addition to different form factors, the stations are available in a variety of colors.



Figure 1



Figure 2



Figure 3

3.4 Audio Messages

The Guardian comes fully programmed with audio files from the factory. Several free applications such as Audacity give you the option to create your own custom messages or tones in a simple .wav format that can be easily uploaded via a USB port. Second languages, gender narrative, and special percussive tones can be easily created and uploaded.

4 System Configuration

The Guardian comes with the user friendly PedConnex utility to configure the station. While the Guardian comes configured from the factory, some installations require modifications to audible messages or functionality to best fit the needs of the crosswalk location.


PedConnex can be downloaded and launched on any number of computers running Windows 7 – 10. The PedConnex utility includes a detailed electronic version of the PedConnex User's Manual which will be referred to in this document. This Guardian User's Manual will direct you to main areas of interest in the PedConnex User's Manual. Please refer to the PedConnex User's Manual for more detailed information on programming and configuration.

PedConnex also incorporates "roll over" help bubbles that explain the various options and how to set them up.

To obtain PedConnex go to <http://www.pedsafety.com/downloads> on the internet and download the PedConnex utility.

4.1 Setting and Operational Mode Features in PedConnex

Note: See the PedConnex User Manual embedded in the PedConnex software for instructions on how to use the utility to manage the station configuration, and for additional information on these settings.

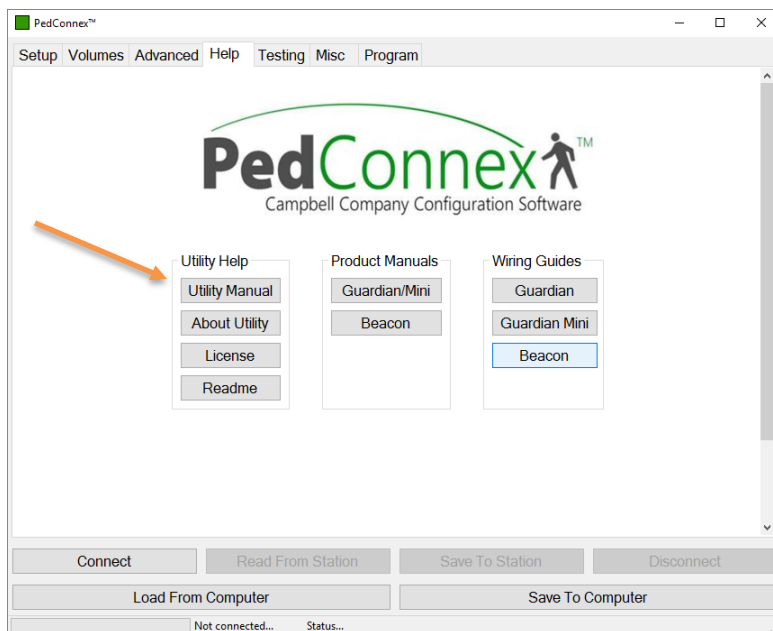

The primary operational settings are located on the “Setup” page and are as follows:

- APS Mode: APS Operational function.
 - Off – No audible, visual, or tactile output
 - MUTCD – Full APS functionality
 - RRFB – For use with a Rectangular Rapid Flashing Beacon (RRFB)
 - Beacon – For use Beacons connected to the Guardian Station
 - Test – Allows functional testing of the Guardian APS
- Extended Press Time: Time to hold the button to get an extended press (in milliseconds)
- Locator Period: Time in seconds between audio indication
- Walk Timeout: Maximum time in seconds for walk message to play
- Ack Repeat Time: Sets time in seconds between repeated acknowledgement message. Set to zero to disable
- Sync Call: Synchronize outputs of two or more pedestrian stations
- Clearance Mode: Audio indication during Flashing Don't Walk. Select among: Off, AlwaysON, DestinationBeacon, and Countdown
- VIB Intensity: Adjust the vibration intensity of the Walk indication
- VIB Pulse Time: Time in milliseconds for the vibrator to run when the button is pressed
- Location: City, State
- Intersection: Cross Street for reference
- CC#: Campbell Company Sales Order Number

Volume and Sound Controls are located on the “Volumes” page.

- Volume: Two settings adjust volume for non-locator and locator tone independently
 - *Non-Locator Volume* – Adjusts the volume of the audible messages or percussive tones or indications
 - *Locator* – Adjusts the locator tone volume
- Night Mode: Night Mode changes the volume settings based on the time of day
- Ambient Gain Control: Ambient Gain Control (AGC) settings change the rate at which the unit volume output reacts to changes in the ambient noise level.

4.2 How to Create and Update Audio Files in the Guardian

The Guardian APS comes fully programmed with audio files from the factory. Campbell Company generates custom messages for the intersection from information on the intersection worksheet submitted for the Purchase Order. An electronic copy of the audible files is available to the customer at time of delivery and should be kept for future use. A full audio library is available at Campbell Company should your requirements change.

5 Appendix A: Definitions

Term	Meaning
Accessible Pedestrian Signal	A device that communicates information about pedestrian signal in a non-visual format such as audible tones, verbal messages, and/or vibrating surfaces (MUTCD)
Adapter Plate	An aluminum plate that mounts to the base station to display crosswalk signs.
Audible Beaconsing	Use of sound to provide directional orientation and alignment information in the clearance phase.
Audio File	A file format for storing digital audio data on a computer system.
Automatic Gain Control (AGC)	An APS volume control that is automatically responsive to ambient (background) sound.
Base Station	Fully integrated APS station that contains the Micro-controller, push button, speaker, adapter plate
Clearance Interval Indication	Tones sounding during the pedestrian clearance interval that are differentiated from the WALK interval indicator (tones)
Clearance mode	<p><i>Sets what and how audio files are played in Flashing Don't Walk.</i></p> <ul style="list-style-type: none"> • <i>Off</i> – No FDW audio. Goes back to locating. • <i>Always On</i> – Plays Clearance indication every activated cycle. • <i>Destination Beaconsing</i> – Destination station provides target beaconsing (Clearance indication) for pedestrian to locate. The station pressed will not play a message. • <i>Countdown</i> – Audible countdown of the clearance phase. <p>Note: Requires one cycle to calibrate Flashing Don't Walk time.</p>
COM Port	Serial communication port
Extended Press	On APS, holding the pedestrian push button down from 1-3 seconds may activate special features, including audible beaconsing and extended pedestrian clearance interval.
Night Mode	An alternate configuration typically used to control audio volume at night time.
Signal Power Interface (SPI)	Power source that interfaces with Pedestrian Signal Head power for Base Station interface.
USB Port	USB connection on Guardian stations.
Utility	Computer software used to configure Guardian stations.
.wav file	An audio file format.