




# Audible Beacon Device

## Wiring Quick Guide

### SPI in the Pedestrian Signal Head (Signal Power Interface)

**WARNING 120 VAC Inputs**

**12 VDC Outputs**

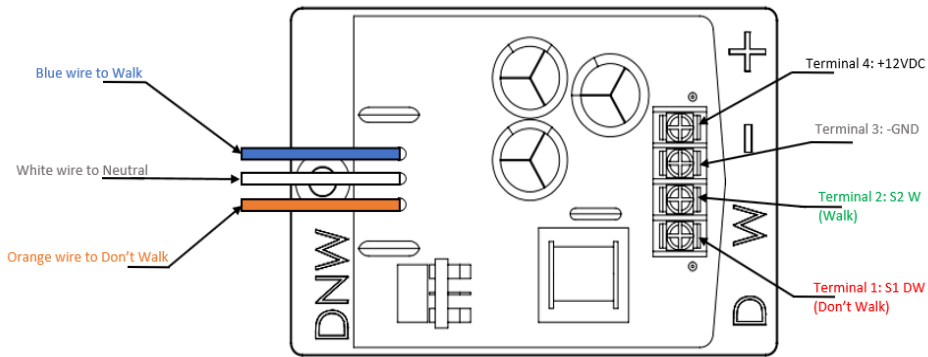

**Do NOT set the SPI** on the bottom of the Pedestrian Signal Head

Terminals of the SPI must be connected to the same terminals on the Base Station

### Cabinet

- ✓ Utilizes the existing Field Wires from cabinet to pedestrian push buttons to place calls from Guardian or Pedestrian Push Button
- ✓ NOT polarity dependent

NOTE: For NEW intersection installations, **in the absence of city or other local specifications**, Campbell Company recommends IMSA 14 Gauge (loop detector wire)

